

Power Inverter



Applications

- Home and Home Office
- Home Theater System
- Small Office

Series Features

- Automatic Switch-Over
- LED Status Indicators
- Overload Protection
- Built-in Intelligent Charger
- Auto-Restart/Auto-Charge
- Horizontal/Wall-Mounted Use (Optional)



LCD TV



Desktop PC





Standing Fan



Lamp

Longer Backup For Appliances

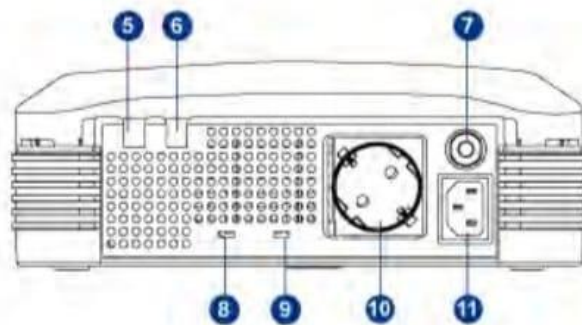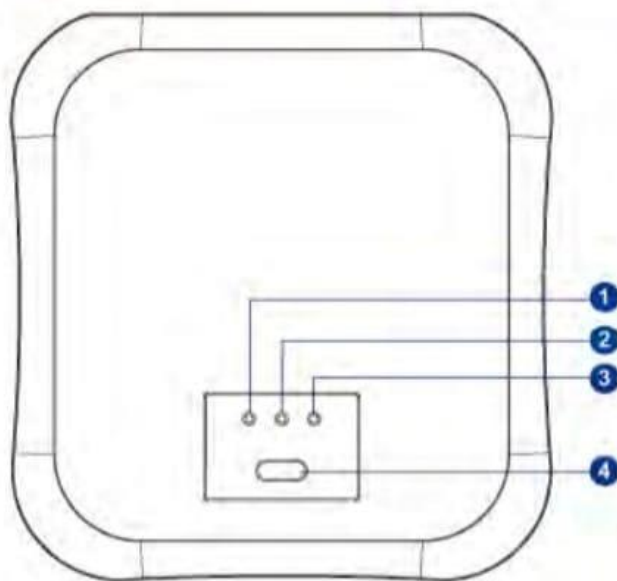

- | | |
|---------------------------|---------------------------------|
| 1. Fault LED | 7. Input Circuit Breaker |
| 2. Battery Mode LED | 8. Charger Control |
| 3. AC Mode LED | 9. Input Voltage Range Selector |
| 4. Power Switch | 10. AC outlet |
| 5. DC Input Cable (Black) | 11. AC Inlet |
| 6. DC Input Cable (Red) | |

Technical Specifications

Model	CPS1000EI	CPS2000EI
Configuration		
Capacity (VA / Watts)	1000 / 600	2000 / 1200
Input		
Frequency Range	50/60Hz	
Output		
UPS Outlets (Numbers)	(1) Schuko	
On Battery Output Voltage	Simulated Sine Wave at 220Vac +/-10%	
On Battery Output Frequency	50/60Hz	
Overload Protection	On Utility: Circuit Breaker On Battery: Internal Current Limiting	
Physical		
Dimensions (L x W x H) (mm)	265 x 250 x 90	
Weight (kg / lbs)	1.9 / 4.2	2.0 / 4.4
Battery		
Lead Acid Battery	12 VDC	24 VDC
Charging Voltage	13.7 ± 0.2 VDC	27.4 ± 0.2 VDC
Charging Current	10A	
Status Indicators		
Indicators	AC Mode, Battery mode, Fault	
Audible Alarms	Low Battery, Overload, Fault	
Management		
Auto-Charge / Auto-Restart	Yes	

Load Chart

Model	CPS1000EI	CPS2000EI
Appliance		
Energy Saving Lamp	4	8
Standing Fan	4	8
42" LCD TV	1	1
Desktop PC	1	1

*Load may vary depending on the condition of the appliance.

#All specifications are subject to change without notice. ©2011 Cyber Power Systems. All Trademarks are the property of their owners.